weaKnees

weaKnees

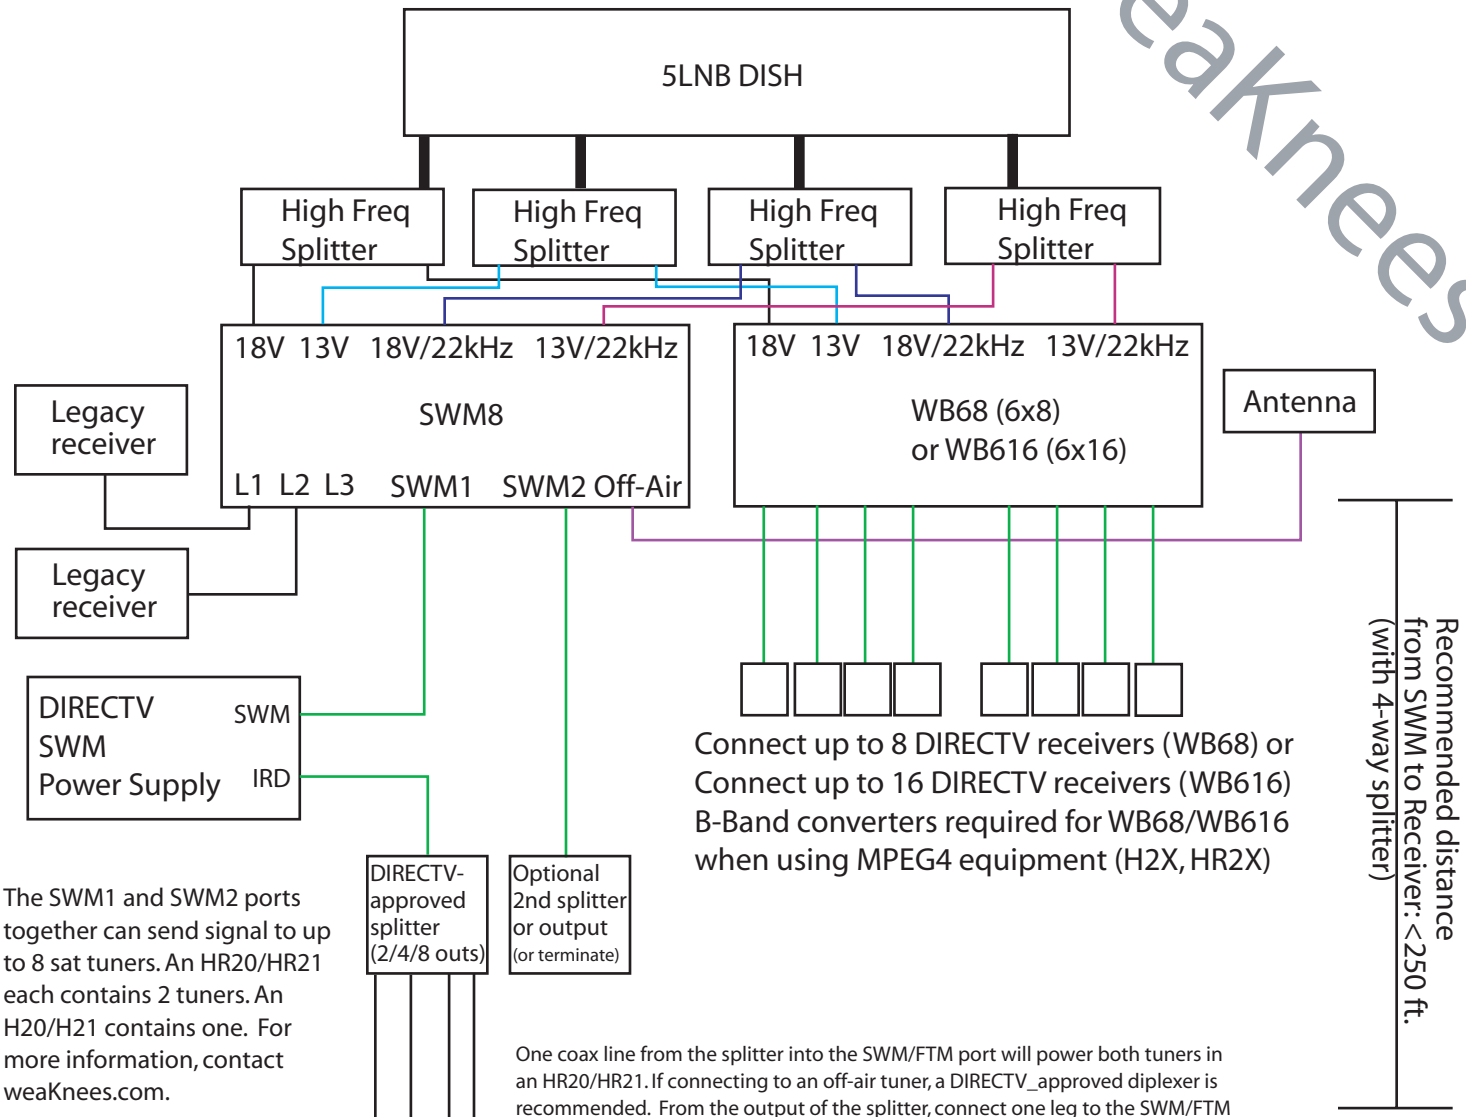

The SWM1 and SWM2 ports together can send signal to up to 8 sat tuners. An HR20/HR21 each contains 2 tuners. An H20/H21 contains one. For more information, contact weaKnees.com.

One coax line from the splitter into the SWM/FTM port will power both tuners in an HR20/HR21. If connecting to an off-air tuner, a DIRECTV_approved diplexer is recommended. From the output of the splitter, connect one leg to the SWM/FTM port and the other to the off-air antenna input. Please contact us for assistance.

In the diagram above, if each of the four SWM-approved receivers is a DVR, then the SWM2 port must be terminated, as all 8 tuners will be used. On the other hand, if all four are basic non-DVRs (eg. H20/H21), then four additional sat tuners can be connected to either the SWM1 or SWM2 port. For more information, contact weaKnees.com.

Additional Notes:

1) DO NOT USE B-BAND CONVERTERS WITH SWM!

2) After SWM installation, perform a red button reset on all receivers (red button is located next to access card).

3) Power on receivers connected to the SWM one at a time. Do not power on all SWM receivers simultaneously.

4) A polarity locker may be necessary between the 5LNB dish and the four high-frequency splitters. Contact us for more information.

weaKnees

(c) 2008-2009 weaKnees.com. All rights reserved.